

DLD900 Series

Stud mount Wireless data dipole

Radio Location/M2M/IoT/UHF 900-930 MHz



The DLD900 series of stud mount dipoles are ideal for wireless data link, M2M, IoT or Radio Location applications within the UHF 900-930 MHz range.

Mounting hardware, coaxial feeder cable, adaptors and other installation accessories are all available separately.

	DLD900	DLD900-2
Construction	Black PVC radome, black delrin mount ferrule, external cable and termination	
Frequency range	900-930 MHz - UHF, ISM, IoT, M2M & LoRa compatible Suits AU915-928, AS923, US902-928, AS920-923, AS923-925 & KR920-923	
Bandwidth	Full frequency range stated - 30 MHz	
VSWR	<2:1	
Tuning	Factory	
Gain	2.1 dBi	
Impedance - nominal	50 Ohms	
Maximum power	20 Watts	
DC grounding	Yes	
Polarisation	Vertical	
H Plane	360° omni-directional	
Cable	900mm RG316 - bottom exit from ferrule	2.0m RG316 - bottom exit from ferrule
Connector	SMA male fitted as standard - or specify requirements	
Height	230mm	
Weight	50grams	90grams
Mounting hardware order separate	Bracket: GM1, GM2, GM6, A-6211, A-4115 or A-4115-2 Hole: 12.7mm diameter	
Mounting position recommended	Mount as high on your structure, pole or mast as possible using the a hole or appropriate mounting hardware with a minimum 12.7mm hole. Do not mount near any vertical metallic objects.	
Installation tools required	19mm or 3/8" spanner for nut securing	



Black delrin mount ferrule with securing nut and external coaxial cable.




SMA male plug connector fitted to RG316 coaxial cable


DLD900 Series

Stud mount Wireless data dipole

Radio Location/M2M/IoT/UHF 900-930 MHz

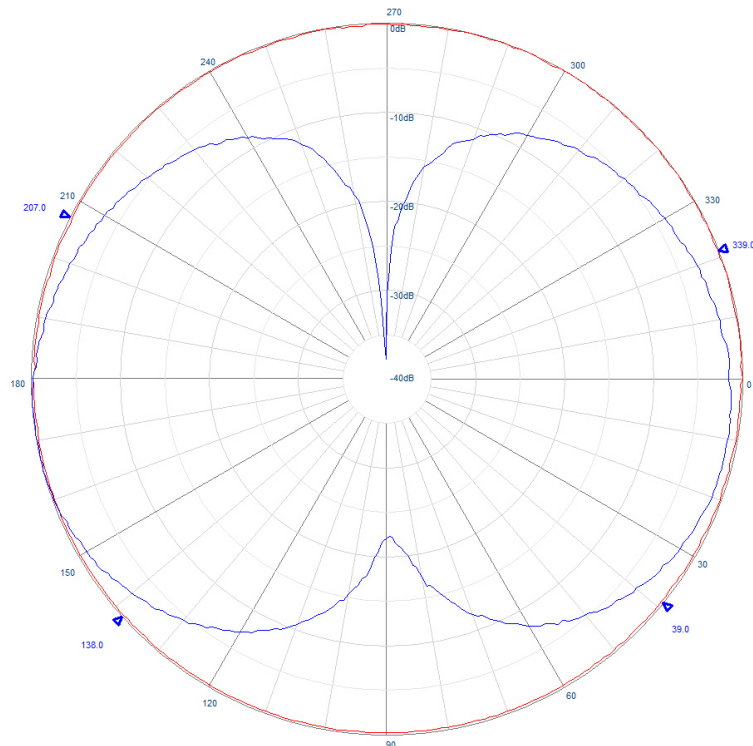

Example radiation pattern

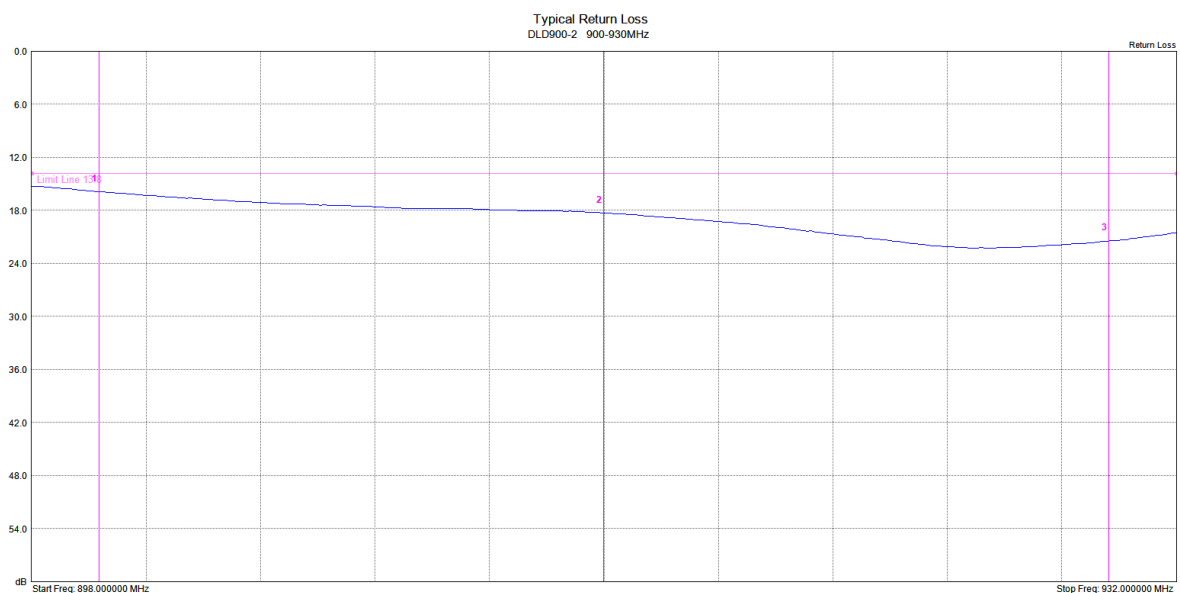

Mir	Ref	Delta	Ref Freq	Ref Amp	Delta Freq	Delta Amp
1	☐	☐	900.000 MHz	15.89 dB	--	--
2	☐	☐	915.000 MHz	18.31 dB	--	--
3	☐	☐	930.000 MHz	21.44 dB	--	--
4	☐	☐	--	--	--	--

Typical Return Loss

DLD900 Series

Stud mount Wireless data dipole

Radio Location/M2M/IoT/UHF 900-930 MHz

 GM1 - 304 stainless steel 'L' fascia mount bracket 16mm hole Requires mounting screws/bolts - not supplied	 GM2 - 304 stainless steel 'Z' fascia mount bracket 16mm hole Requires mounting screws/bolts - not supplied
 MRM-SS 304 stainless steel 'clamp' mounting bracket 20-25mm capability 16mm hole	 GM6 - 304 stainless steel 'L' fascia mount bracket 16mm slot Requires mounting screws/bolts - not supplied
 MRM-SS 304 stainless steel 'clamp' mounting bracket 20-25mm capability 16mm hole	 BBM-SS series 304 stainless steel 'wrap around' mounting bracket 50-76mm capability depending on model 16mm hole
 A-4115-2 - aluminium 'L' fascia mount bracket 12.7mm hole, 35mm offset Requires mounting screws/bolts - not supplied	 A-6211 - 304 stainless steel 'L' fascia mount bracket 16mm hole, 200mm offset Requires mounting screws/bolts - not supplied
 MGB Powdercoated black internal magnet mount base 16mm hole 105mm diameter Can be fitted during manufacture includes scratch reduction pad on base	

Typical alternate connectors

 P/N 7963-10 Reverse gender SMA male crimp termination Also available in standard gender and opposite gender	 P/N 8278 N-type male termination Suits mobile/telemetry devices Also available in alternate gender
---	---