## B4BE-7-27 Bracket Mount Antenna

B4BE-7-27



### B4BE-7-27

- •Cost Effective 2G/3G/4G and 3.8GHz 5G coverage
- Wall or mast mounted


The B4BE antenna is a cost effective omni-directional broad band antenna for 4G/3G/2G and 3.8GHz 5G devices and is suitable for external or internal installation.

PANORAMA 🕐 ANTENNAS

The design of the mounting bracket enables simple wall mounting using the supplied screws and wall plugs or mast mounting using a pipe clip or cable ties (not supplied).

The omni-directional radiation pattern allows easy placement of the antenna in an elevated positon.

This antenna is an ideal solution for use in industrial and domestic environments with cellular modems/routers and Machine to Machine (M2M) wireless connectivity applications.

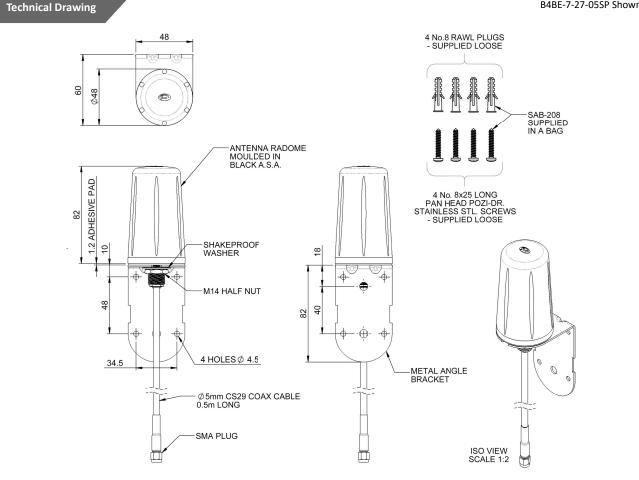

Panorama Antennas Ltd Frogmore, London, SW18 1HF, United Kingdom T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477 E: sales@panorama-antennas.com W: www.panorama-antennas.com

#### PANORAMA 🕐 ANTENNAS


Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved.

23/11/2018 V4

B4BE-7-27-05SP Shown

# B4BE-7-27 Bracket Mount Antenna PANORAMA (PANTENNAS

B4BE-7-27

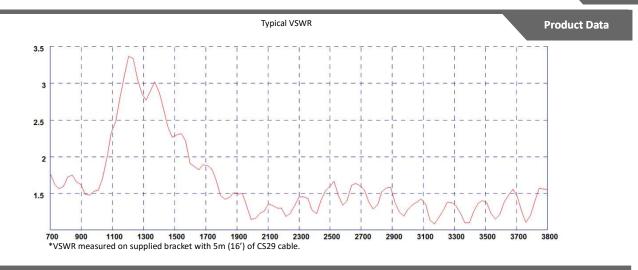

Part No.				
		B4BE-7-27-05SP	B4BE-7-27-5SP	
Electrical Data				
Frequency Range (MHz)		698-96	698-960 / 1710-3800	
Operational Band		700/800/900/1800/1900/2100/2400/2600/3600		
Peak Realised Gain: Isotropic*	698-960MHz		2dBi	
	1710-3800 MHz	5dBi		
VSWR <2.5:1		<2.5:1		
Polarisation			Vertical	
Pattern		Omr	Omni-directional	
Impedance			50Ω	
Max Input Power (W)		30		
Mechanical Data				
Dimensions (mm)	Height mounted	164 (6.46")		
	Diameter	48(1.89")		
Operating Temp (°C)		-40° / +85°C ( -40° / 185°F )		
Material		ASA, aluminium, galvanised steel		
Colour		Black & natural (white version available p/n B4BEW)		
Ingress Protection		IP66		
Mounting Data				
Fixing		Wall or mast mount		
Mounting Scew Diameter (mm)		4 (0.16")		
Weight (g)		188	372	
Cable Data				
Туре		CS29 (dou	CS29 (double shielded RG58)	
Diameter (mm)		5(0.19")		
Length (m)		0.5 (1.5′)	5(17')	
Termination		SMA plug	SMA plug	

\* Peak gain simulated in CST microwave studio on a ground plane excluding cable loss

Panorama Antennas Ltd Frogmore, London, SW18 1HF, United Kingdom T: +44 (0)20 8877 4444 | F: +44 (0)20 8877 4477 E: sales@panorama-antennas.com W: www.panorama-antennas.com

PANORAMA 🕐 ANTENNAS


Waiver: The data given above is indicative of the performance of the product/s under particular conditions and does not imply a guarantee of performance. These specifications are subject to change without notice. Copyright © Panorama Antennas Ltd. All rights reserved. 23/11/2018 V4

# B4BE-7-27 Panel Mount Antenna

### PANORAMA 🌮 ANTENNAS

B4BE-7-27

W: www.panorama-antennas.com

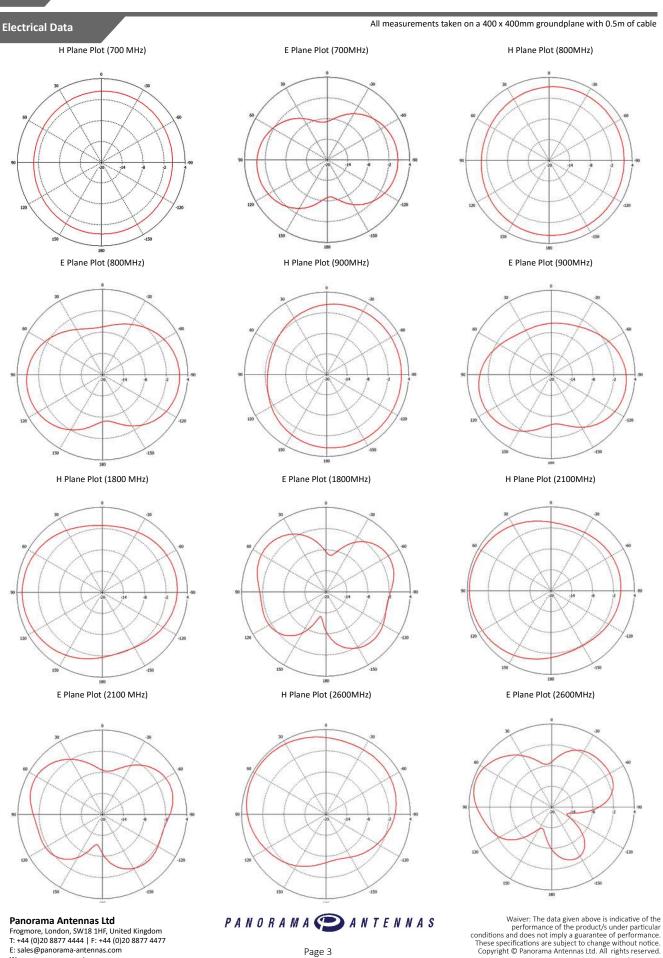

23/11/2018 V4