


VM5B-M/E/H

NUMBER OF SECTIONS

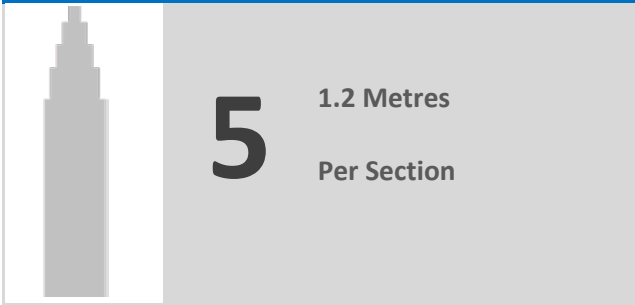

MAST PARAMETER

Extended Height: 5200mm/17'1"

Retracted Height: 1440mm/4'9"

SQUARE TUBE DIMENSION

Height of each section: 1200mm

Top tube size: 60 Squareness

Second tube size: 80 Squareness

Thirt tube size: 100 Squareness

Fouth tube size: 120 Squareness

Base tube size: 140 Squareness

FEATURES

Type: Multi-Section Retractable Mast

Anti-corrosion Treatment: Galvanization & Powder Coat

Wind Rating Speed: 120kph



PARTS FOR OPTION

Hand Winch: 1200Lbs

Self-locking

Electric Winch: 4500Lbs

DC12/24V

Hydraulic Cylinder: 2.2KW

DC12/24V
AC110-240V

Cable: 5.2m Spiral


Tensioning Ropes: 6m(φ6mm)*3

SELECTION TABLE:

Code	Lifting Driver	Cable	Tensioning Ropes
VM5B	M (mechanical) 1200(LBS)	N(None) C(Cable)	N(None) R(Tensioning Ropes)
	E (electric) 4500(LBS)		
	H (hydraulic) DC12(V) DC24(V) AC110-240(V)		

PARAMETER LIST:

Code	Max payload	Weight
VM5B-M	50(KGS)	90(KGS)
VM5B-E	100(KGS)	95(KGS)
VM5B-H	100(KGS)	102(KGS)

 ORDER	Code	Lifting Driver		Cable	Tensioning Ropes
	VM5B	-M	-1200	-C	-R