



## RF Signal Splitter 4-Way - 4.3-10 Female - 700-3800MHz

SKU: PWPS-4WAY-4310

Cavity power splitters are used in a wide verity of applications and can cater to any solution where RF signal needs to be equally distributed to multiple RF paths.

- Splitter/Combiner function
- Supports 3G, 4G & 5G
- 4 x 4.3-10 Female output
- IP65

### Electrical Specifications

Frequency	698-3800MHz
Nominal Impedance	50Ω
VSWR	≤1.35
Insertion Loss	≤5.6dB
Isolation	> 20dB
3 <sup>rd</sup> PIM	≤-150dBc@2*43dBm
Max Power	500W

### Mechanical Specifications


Colour	Black
Connector	4 x 4.3-10 Female
Operating Temperature	-30°C to +60°C
Environmental	IP65
Dimensions	272x65x45mm
Weight	500g
Relative Humidity	5%-95%



# TELCO ANTENNAS

REMOTE & HIGH SPEED COMMUNICATIONS

## PRODUCT DRAWING

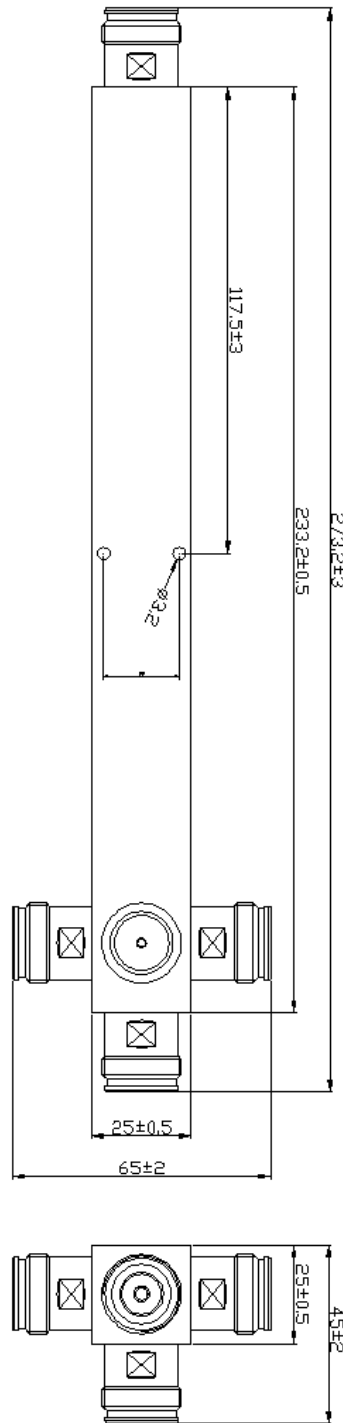

Telco Antennas Pty Ltd

WWW.TELCOANTENNAS.COM.AU

| VHF | UHF | 3G | 4G | 5G | IoT | WiFi | ISM | Microwave | WiFi |  
| Remote & High Speed Communications Design & Integration | Electrical & Data Contracting |

sales@telcoantennas.com.au  
+ 61 7 3393 9919